



Solving Travelling Salesmen Problem using Ant Colony Optimization Algorithm

Dr. B. V. Raghavendra
JSS Academy of Technical Education, Bangalore-560 060.

Abstract

Ant Colony Optimization is a new meta-heuristic technique used for solving different combinatorial optimization problems. ACO is based on the behaviours of ant colony and this method has strong robustness as well as good distributed calculative mechanism. ACO has very good search capability for optimization problems. Travelling salesman problem is one of the most famous combinatorial optimization problems. In this paper we applied the ant colony optimization technique for symmetric travelling salesperson problem. Analysis are shown that the ant select the rich pheromone distribution edge for finding out the best path.

Keywords: Ant Colony Optimization; ACO; Travelling Salesman Problems.

1. Introduction

Ant Colony Optimization (ACO) is a relatively new meta-heuristic and successful technique in the field of swarm intelligence. This technique was first introduced by Dorigo and his colleagues [1, 2]. This technique is used for many applications especially problems that belong to the combinatorial optimization. ACO algorithm models represent the behavior of real ant colonies in establishing the shortest path between food sources and nests. The ants release pheromone on the ground while walking from their nest to food and then go back to the nest. The ants move according to the richer amount of pheromones on their path and other ants would be followed and will tend to choose a shorter path which would have a higher amount of pheromone. Artificial ants imitate the behavior of real ants, but can solve much more complicated problem than real ants can.

ACO has been widely applied to solving various combinatorial optimization problems such as traveling salesman problem (TSP), job-shop scheduling problem (JSP), vehicle routing problem (VRP), quadratic assignment problem (QAP), etc. [3]. Although ACO has a powerful capacity to find out solutions to combinatorial optimization problems, it has the problems of stagnation, premature convergence and the convergence speed of ACO is always slow. These problems will be more obvious when the problem size increases.

The traveling salesman problem (TSP) is the problem of finding a shortest closed tour which visits all the cities in a given set. In a symmetric TSP the distance between two cities is the same regardless of the direction of travel whereas in the asymmetric TSP the distance is different with regards to the direction of travel [4]. This paper restricts attention to symmetric TSPs in which cities are on a plane and a path (edge) exists between each pair of cities. The definition of a TSP is: given N cities, if a salesman starting from his home city is to visit each city exactly once and then return home, find the order of a tour such that the total distances (cost/time/money/energy etc) traveled should be minimum. A complete weighted graph $G = (N, E)$ can be used to represent a TSP, where N is the set of n cities and E is the set of edges (paths) fully connecting all cities. Each edge $(i,j) \in E$ is assigned a cost d_{ij} , which is the distance between cities i and j [5,6,7].

2. Methodology of Ant Colon Optimization Model

The Ant System was first introduced and applied to TSP by Marcodorigo et al. Initially, each ant is placed on some randomly chosen city. An ant k currently at city i choose to move to city j by applying the following probabilistic transition rule:

$$p_{ij}^k(t) = \begin{cases} \frac{[\tau_{ij}(t)]^\alpha [\eta_{ij}]^\beta}{\sum_{k \in \text{allowed}_k} [\tau_{ik}(t)]^\alpha [\eta_{ik}]^\beta} & \text{if } j \in \text{allowed}_k \\ 0 & \text{otherwise} \end{cases}$$


where η_{ij} is the heuristic visibility of edge (i, j), generally it is a value of $1/d_{ij}$, where d_{ij} is the distance between city i and city j. City J is a set of cities which remain to be visited when the ant is at city i. α and β are two adjustable positive parameters that control the relative weights of the pheromone trail and of the heuristic visibility. If $\alpha=0$, the closed vertex i more likely to be selected. This is responding to a classical stochastic greedy algorithm. If $\beta=0$, only pheromone amplification is at work: This method will lead the system to a stagnation situation, i.e. a situation in which all the ants generate a sub-optimal tour. So the trade-off between edge length and pheromone intensity is necessary. After each ant completes its tour, the pheromone amount on each path will be adjusted according to equation (1-ρ) is the pheromone decay parameter ($0 < \rho < 1$) where it represents the trail evaporation when the ant chooses a city and decides to move. Number of ants represented by m, L_k is the length of the tour performed by ant k and Q is an arbitrary constant [8,9]. After all the ants complete their tour the pheromone is required to be updated using

$$\tau_{ij}(t+1) = (1 - \rho)\tau_{ij}(t) + \Delta\tau_{ij}(t)$$

where

$$\Delta\tau_{ij}(t) = \sum_{k=1}^m \Delta\tau_{ij}^k(t)$$

Tour Length: $\Delta\tau_{i,j}^k = \begin{cases} \frac{Q}{L_k} & \text{if } (i, j) \in \text{tour}_k \\ 0 & \text{otherwise} \end{cases}$

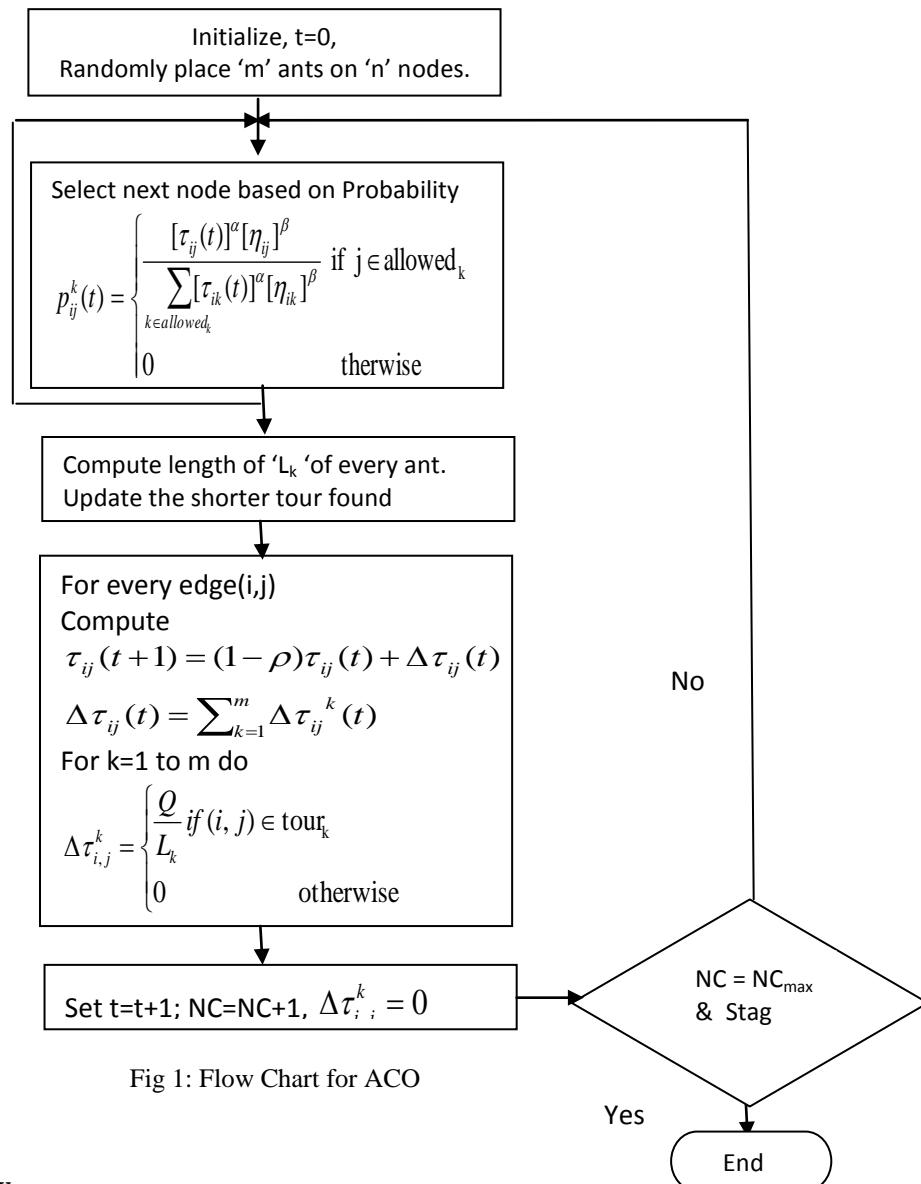

3. Methodology

In this paper a symmetric travelling salesman problem is presented for five cities. The distance of each city is given in the Table 1 and their visibility for each edge is shown in Table 2.

Table 1: Distance (d_{ij}) of cities

Cities/ Cities	A	B	C	D	E
A	∞	3	6	2	3
B	3	∞	5	2	3
C	6	5	∞	6	4
D	2	2	6	∞	6
E	3	3	4	6	∞

Table 2: Visibility of edge = $1/d_{ij}$

Cities/ Cities	A	B	C	D	E
A	∞	0.33	0.16	0.5	0.33
B	0.33	∞	0.2	0.5	0.33
C	0.16	0.2	∞	0.16	0.25
D	0.5	0.5	0.16	∞	0.16
E	0.33	0.33	0.25	0.16	∞

Parameter Selection:

No of Ants=5

$\alpha = 0.7$, $\beta = 0.7$, $Q = 1$, Number of iteration=5

Initially pheromone (τ) distribution for each edge=1

Table3: Randomly Select the First City by each ant

Ant	1	2	3	4	5
City	A	B	C	D	E

4. Results and Discussion

Ant colony optimization methodology is presented for symmetric cities of travelling salesmen problem in this paper. A detailed procedure for city selection for respective ant is presented in the Table 4 to 8 for iteration 1 to 5. The selection of next city is based on the maximum probability within the set of possible selection of the cities for next move. This is marked as '*' in the respective iteration. In the Table 4, ant 2, 3 and 5 gives the minimum distance with the initially assumed pheromone which is one for each edge. The minimum distance remain same for the ant 2, 3 and 5 for iteration 2, however the pheromone (τ) distribution is different because of updating the pheromone in the iteration 2 for each edge based on the updating rule. In the iteration 4, the ant 1, 2, 3 and 5 are selected the best path with minimum distance. However in the iteration 5, all the ants are converged to the minimum distance. The pheromone (τ) distribution for iteration, 2, 3, 4 and 5 are updated for each iteration. The distribution of the pheromone (τ) for each edge is shown in the beginning of the respective table.

5. Conclusion

It is shown in the iteration number 5 that all the ants converge to the best path which gives minimum distance. The pheromone distribution for iteration and the next city selection based on maximum probability is determined in the iteration. It is evident from the analysis that the rich pheromone edge is converges the best path for the travelling salesmen problems.

Table 4: Iteration-1

Pheromone Distribution						
City	A	B	C	D	E	
A	0	1	1	1	1	
B	1	0	1	1	1	
C	1	1	0	1	1	
D	1	1	1	0	1	
E	1	1	1	1	0	

Selection of Cities for respective ant						
City	T	T ^a	Cost(n)	1/n	(1/n) ^b	T ^a (1/n) ^b
						Probability of next city

Ant 1 Path						
------------	--	--	--	--	--	--

Selection of Second City						
AB	1	1.000	3	0.3333	0.4635	0.4635
AC	1	1.000	6	0.1667	0.2853	0.2853
*AD	1	1.000	2	0.5000	0.6156	0.6156
AE	1	1.000	3	0.3333	0.4635	0.4635

Selection of third City						
*DB	1	1.000	2	0.5000	0.6156	0.6156
DC	1	1.000	6	0.1667	0.2853	0.2853
DE	1	1.000	6	0.1667	0.2853	0.2853

Selection of fourth City						
BC	1	1.000	5	0.2000	0.3241	0.3241
*BE	1	1.000	3	0.3333	0.4635	0.4635

Selection of last City						
*EC	1	1.000	4	0.2500	0.3789	0.3789

Path for ant 1: A D B E C A						
Distance	2	2	3	4	6	Total= 17

Ant 2 Path						
------------	--	--	--	--	--	--

Selection of Second City						
BA	1	1.000	3	0.3333	0.4635	0.4635
BC	1	1.000	5	0.2000	0.3241	0.3241
*BD	1	1.000	2	0.5000	0.6156	0.6156
BE	1	1.000	3	0.3333	0.4635	0.4635

Selection of third City						
*DA	1	1.000	2	0.5000	0.6156	0.6156
DC	1	1.000	6	0.1667	0.2853	0.2853
DE	1	1.000	6	0.1667	0.2853	0.2853

Selection of fourth City						
AC	1	1.000	6	0.1667	0.2853	0.2853
*AE	1	1.000	3	0.3333	0.4635	0.4635

Selection of last City						
*EC	1	1.000	6	0.1667	0.2853	0.2853

Path for ant 2: B D A E C B						
Distance	2	2	3	4	5	Total= 16

Ant 3 Path						
------------	--	--	--	--	--	--

Selection of Second City						
CA	1	1.000	6	0.1667	0.2853	0.2853
CB	1	1.000	5	0.2000	0.3241	0.3241
CD	1	1.000	6	0.1667	0.2853	0.2853
*CE	1	1.000	4	0.2500	0.3789	0.3789

Table 4: Cont..

City	T	T ^a	Cost(n)	1/n	(1/n) ^b	T ^a (1/n) ^b	$\sum T^a(1/n)^b$	Probability of next city
Selection of third City								
*EA	1	1.000	3	0.3333	0.4635	0.4635	1.2122	0.3823
EB	1	1.000	3	0.3333	0.4635	0.4635	1.2122	0.3823
ED	1	1.000	6	0.1667	0.2853	0.2853	1.2122	0.2354
Selection of fourth City								
AB	1	1.000	3	0.3333	0.4635	0.4635	1.0790	0.4295
*AD	1	1.000	2	0.5000	0.6156	0.6156	1.0790	0.5705
Selection of last City								
*DB	1	1.000	2	0.5000	0.6156	0.6156	0.6156	1.0000
Path for ant 3: C E A D B C								
Distance	4	3	2	2	5		Total=16	
Ant 4 Path								
Selection of Second City								
*DA	1	1.000	2	0.5000	0.6156	0.6156	1.8017	0.3417
DB	1	1.000	2	0.5000	0.6156	0.6156	1.8017	0.3417
DC	1	1.000	6	0.1667	0.2853	0.2853	1.8017	0.1583
DE	1	1.000	6	0.1667	0.2853	0.2853	1.8017	0.1583
Selection of third City								
*AB	1	1.000	3	0.3333	0.4635	0.4635	1.2122	0.3823
AC	1	1.000	6	0.1667	0.2853	0.2853	1.2122	0.2354
AE	1	1.000	3	0.3333	0.4635	0.4635	1.2122	0.3823
Selection of fourth City								
BC	1	1.000	5	0.2000	0.3241	0.3241	0.7876	0.4115
*BE	1	1.000	3	0.3333	0.4635	0.4635	0.7876	0.5884
Selection of last City								
*EC	1	1.000	4	0.2500	0.3789	0.3789	0.3789	1.0000
Path for ant 4: D A B E C D								
Distance	2	3	3	4	6		Total=18	
Ant 5 Path								
Selection of Second City								
*EA	1	1.000	3	0.3333	0.4635	0.4635	1.5912	0.2913
EB	1	1.000	3	0.3333	0.4635	0.4635	1.5912	0.2913
EC	1	1.000	4	0.2500	0.3789	0.3789	1.5912	0.2381
ED	1	1.000	6	0.1667	0.2853	0.2853	1.5912	0.1793
Selection of third City								
AB	1	1.000	3	0.3333	0.4635	0.4635	1.3643	0.3397
AC	1	1.000	6	0.1667	0.2853	0.2853	1.3643	0.2091
*AD	1	1.000	2	0.5000	0.6156	0.6156	1.3643	0.4512
Selection of fourth City								
*DB	1	1.000	2	0.5000	0.6156	0.6156	0.9009	0.6833
DC	1	1.000	6	0.1667	0.2853	0.2853	0.9009	0.3167
Selection of last City								
*BC	1	1.000	5	0.2000	0.3241	0.3241	0.3241	1.0000
Path for ant 5: E A D B C E								
Distance	3	2	2	5	4		Total=16	
* Selected Edge								

Table 5: Iteration-2

Pheromone Distribution						
	A	B	C	D	E	
A	0	0.5	0.5	0.625	0.625	
B	0.5	0	0.5625	0.625	0.5	
C	0.5	0.625	0	0.5	0.6875	
D	0.5625	0.5625	0.5	0	0.5	
E	0.5625	0.5	0.5	0.5	0	

Selection of Cities for respective ant								
City	T	T ^a	Cost(n)	1/n	(1/n) ^b	T ^a (1/n) ^b	$\sum T^a(1/n)^b$	Probability of next city
Ant 1 Path								
Selection of Second City								
AB	0.500	0.6156	3	0.3333	0.4635	0.2853	1.2374	0.2306
AC	0.500	0.6156	6	0.1667	0.2853	0.1756	1.2374	0.1419
*AD	0.625	0.7196	2	0.5000	0.6156	0.4430	1.2374	0.3580
AE	0.625	0.7196	3	0.3333	0.4635	0.3335	1.2374	0.2695
Selection of third City								
*DB	0.563	0.6685	2	0.5000	0.6156	0.4115	0.7627	0.5395
DC	0.500	0.6156	6	0.1667	0.2853	0.1756	0.7627	0.2303
DE	0.500	0.6156	6	0.1667	0.2853	0.1756	0.7627	0.2303
Selection of fourth City								
BC	0.563	0.6685	5	0.2000	0.3241	0.2167	0.5020	0.4316
*BE	0.500	0.6156	3	0.3333	0.4635	0.2853	0.502	0.5683
Selection of last City								
*EC	0.500	0.6156	4	0.2500	0.3789	0.2333	0.2333	1.0000
Path for ant 1: A D B E C A								
Distance	2	2	3	4	6	Total = 17		
Ant 2 Path								
Selection of Second City								
BA	0.5	0.6156	3	0.3333	0.4635	0.2853	1.2303	0.2319
BC	0.5625	0.6685	5	0.2000	0.3241	0.2167	1.2303	0.1761
*BD	0.625	0.7196	2	0.5000	0.6156	0.4430	1.2303	0.3601
BE	0.5	0.6156	3	0.3333	0.4635	0.2853	1.2303	0.2319
Selection of third City								
*DA	0.5625	0.6685	2	0.5000	0.6156	0.4115	0.7627	0.5395
DC	0.5	0.6156	6	0.1667	0.2853	0.1756	0.7627	0.2303
DE	0.5	0.6156	6	0.1667	0.2853	0.1756	0.7627	0.2303
Selection of fourth City								
AC	0.5	0.6156	6	0.1667	0.2853	0.1756	0.5091	0.3449
*AE	0.625	0.7196	3	0.3333	0.4635	0.3335	0.5091	0.6551
Selection of last City								
*EC	0.5	0.6156	4	0.2500	0.3789	0.2333	0.2333	1.0000
Path for ant 2: B D A E C B								
Distance	2	2	3	4	5	Total = 16		
Ant 3 Path								
Selection of Second City								
CA	0.5	0.6156	6	0.1667	0.2853	0.1756	0.8572	0.2049
CB	0.625	0.7196	5	0.2000	0.3241	0.2333	0.8572	0.2721
CD	0.5	0.6156	6	0.1667	0.2853	0.1756	0.8572	0.2049
*CE	0.625	0.7196	4	0.2500	0.3789	0.2727	0.8572	0.3181

Table 5: Cont...

City	T	T ^a	Cost(n)	1/n	(1/n) ^b	T ^a (1/n) ^b	$\sum T^a(1/n)^b$	Probability of next city
Selection of third City								
*EA	0.5625	0.6685	3	0.3333	0.4635	0.3098	0.7707	0.4020
EB	0.5	0.6156	3	0.3333	0.4635	0.2853	0.7707	0.3702
ED	0.5	0.6156	6	0.1667	0.2853	0.1756	0.7707	0.2279
Selection of fourth City								
AB	0.5	0.6156	3	0.3333	0.4635	0.2853	0.7283	0.3917
*AD	0.625	0.7196	2	0.5000	0.6156	0.4430	0.7283	0.6083
Selection of last City								
*DB	0.5625	0.6685	2	0.5000	0.6156	0.4115	0.4115	1.0000
Path for ant 3: C E A D B C								
Distance	4	3	2	2	5	Total = 16		
Ant 4 Path								
Selection of Second City								
*DA	0.5625	0.6685	2	0.5000	0.6156	0.4115	1.1742	0.3504
DB	0.5625	0.6685	2	0.5000	0.6156	0.4115	1.1742	0.3504
DC	0.5	0.6156	6	0.1667	0.2853	0.1756	1.1742	0.1496
DE	0.5	0.6156	6	0.1667	0.2853	0.1756	1.1742	0.1496
Selection of third City								
AB	0.5	0.6156	3	0.3333	0.4635	0.2853	0.7944	0.3591
AC	0.5	0.6156	6	0.1667	0.2853	0.1756	0.7944	0.2211
*AE	0.625	0.7196	3	0.3333	0.4635	0.3335	0.7944	0.4198
Selection of four City								
EC	0.5	0.6156	5	0.2000	0.3241	0.1995	0.4848	0.4115
*EB	0.5	0.6156	3	0.3333	0.4635	0.2853	0.4848	0.5885
Selection of last City								
*BC	0.5625	0.6685	4	0.2500	0.3789	0.2533	0.2533	1.0000
Path for ant 4: D A E B C D								
Distance	2	3	3	5	6	Total = 19		
Ant 5 Path								
Selection of Second City								
*EA	0.5625	0.6685	3	0.3333	0.4635	0.3098	1.0040	0.3086
EB	0.5	0.6156	3	0.3333	0.4635	0.2853	1.0040	0.2842
EC	0.5	0.6156	4	0.2500	0.3789	0.2333	1.0040	0.2323
ED	0.5	0.6156	6	0.1667	0.2853	0.1756	1.0040	0.1749
Selection of third City								
AB	0.5	0.6156	3	0.3333	0.4635	0.2853	0.9039	0.3156
AC	0.5	0.6156	6	0.1667	0.2853	0.1756	0.9039	0.1943
*AD	0.625	0.7196	2	0.5000	0.6156	0.4430	0.9039	0.4901
Selection of fourth City								
*DB	0.5625	0.6685	2	0.5000	0.6156	0.4115	0.5871	0.7009
DC	0.5	0.6156	6	0.1667	0.2853	0.1756	0.5871	0.2991
Selection of last City								
*BC	0.5625	0.6685	5	0.2000	0.3241	0.2167	0.2167	1.0000
Path for ant 5: E A D B C E								
Distance	3	2	2	5	4	Total = 16		
* Selected Edge								

Table 6: Iteration-3

Pheromone distribution						
	A	B	C	D	E	
A	0	0.25	0.25	0.4375	0.4375	
B	0.25	0	0.34375	0.4375	0.25	
C	0.25	0.4375	0	0.25	0.53125	
D	0.34375	0.34375	0.25	0	0.25	
E	0.34375	0.25	0.25	0.25	0	

Selection of Cities for respective ant						
City	T	T ^a	Cost(n)	1/n	(1/n) ^b	T ^a (1/n) ^b
						Probability of next city

Ant 1 Path						
Selection of Second City						
AB	0.25	0.3789	3	0.3333	0.4635	0.1756
AC	0.25	0.3789	6	0.1667	0.2853	0.1081
*AD	0.4375	0.5606	2	0.5000	0.6156	0.3451
AE	0.4375	0.5606	3	0.3333	0.4635	0.2598
Selection of third City						
*DB	0.4375	0.5606	2	0.5000	0.6156	0.3451
DC	0.25	0.3789	6	0.1667	0.2853	0.1081
DE	0.25	0.3789	6	0.1667	0.2853	0.1081
Selection of fourth City						
BC	0.3438	0.4736	5	0.2000	0.3241	0.1535
*BE	0.25	0.3789	3	0.3333	0.4635	0.1756
Selection of last City						
*EC	0.5313	0.6423	4	0.2500	0.3789	0.2434
Path for ant 1: A B E C A						
Distance	2	2	3	4	6	Total = 17
Ant 2 Path						
Selection of Second City						
BA	0.25	0.3789	3	0.3333	0.4635	0.1756
BC	0.3438	0.4736	5	0.2000	0.3241	0.1535
*BD	0.4375	0.5606	2	0.5000	0.6156	0.3451
BE	0.25	0.3789	3	0.3333	0.4635	0.1756
Selection of third City						
*DA	0.4375	0.5606	2	0.5000	0.6156	0.3451
DC	0.25	0.3789	6	0.1667	0.2853	0.1081
DE	0.25	0.3789	6	0.1667	0.2853	0.1081
Selection of fourth City						
AC	0.25	0.3789	6	0.1667	0.2853	0.1081
*AE	0.4375	0.5606	3	0.3333	0.4635	0.2598
Selection of last City						
*EC	0.5313	0.6423	4	0.2500	0.3789	0.2434
Path for ant 2: B D A E C B						
Distance	2	2	3	4	5	Total = 16
Ant 3 Path						
Selection of Second City						
CA	0.25	0.3789	6	0.1667	0.2853	0.1081
CB	0.4375	0.5606	5	0.2000	0.3241	0.1817
CD	0.25	0.3789	6	0.1667	0.2853	0.1081
*CE	0.5313	0.6423	4	0.2500	0.3789	0.2434

Table 6: Cont...

City	T	T ^a	Cost(n)	1/n	(1/n) ^b	T ^a (1/n) ^b	$\sum T^a(1/n)^b$	Probability of next city
Selection of third City								
*EA	0.4375	0.5606	3	0.3333	0.4635	0.2598	0.5436	0.4780
EB	0.25	0.3789	3	0.3333	0.4635	0.1756	0.5436	0.3231
ED	0.25	0.3789	6	0.1667	0.2853	0.1081	0.5436	0.1989
Selection of fourth City								
AB	0.25	0.3789	3	0.3333	0.4635	0.1756	0.5207	0.3373
*AD	0.4375	0.5606	2	0.5000	0.6156	0.3451	0.5207	0.6628
Selection of last City								
*DB	0.4375	0.5606	2	0.5000	0.6156	0.3451	0.3451	1.0000
Path for ant 3: C E A D B C								
Distance	4	3	2	2	5	Total = 16		
Ant 4 Path								
Selection of Second City								
*DA	0.3438	0.4736	2	0.5000	0.6156	0.2915	0.7993	0.3647
DB	0.3438	0.4736	2	0.5000	0.6156	0.2915	0.7993	0.3647
DC	0.25	0.3789	6	0.1667	0.2853	0.1081	0.7993	0.1353
DE	0.25	0.3789	6	0.1667	0.2853	0.1081	0.7993	0.1353
Selection of third City								
AB	0.25	0.3789	3	0.3333	0.4635	0.1756	0.5032	0.3490
AC	0.25	0.3789	6	0.1667	0.2853	0.1081	0.5032	0.2148
*AE	0.3438	0.4736	3	0.3333	0.4635	0.2195	0.5032	0.4362
Selection of fourth City								
EC	0.25	0.3789	5	0.2000	0.3241	0.1228	0.2984	0.4115
*EB	0.25	0.3789	3	0.3333	0.4635	0.1756	0.2984	0.5885
Selection of last City								
*BC	0.4375	0.5606	4	0.2500	0.3789	0.2124	0.2124	1.0000
Path for ant 4: D A E B C D								
Distance	2	3	3	5	6	Total = 19		
Ant 5 Path								
Selection of Second City								
*EA	0.3438	0.4736	3	0.3333	0.4635	0.2195	0.7365	0.2980
EB	0.25	0.3789	3	0.3333	0.4635	0.1756	0.7365	0.2385
EC	0.25	0.3789	4	0.2500	0.3789	0.2333	0.7365	0.3167
ED	0.25	0.3789	6	0.1667	0.2853	0.1081	0.7365	0.1468
Selection of third City								
AB	0.25	0.3789	3	0.3333	0.4635	0.1756	0.5753	0.3053
AC	0.25	0.3789	6	0.1667	0.2853	0.1081	0.5753	0.1879
*AD	0.3438	0.4736	2	0.5000	0.6156	0.2915	0.3996	0.7295
DC	0.25	0.3789	6	0.1667	0.2853	0.1081	0.3996	0.2705
Selection of last City								
*BC	0.4375	0.5606	5	0.2000	0.3241	0.1817	0.1817	1.0000
Path for ant 5: E A D B C E								
Distance	3	2	2	5	4	Total = 16		
* Selected Edge								

Table 7: Iteration-4

Pheromone distribution						
	A	B	C	D	E	
A	0	0.1250	0.1250	0.3438	0.3438	
B	0.1250	0	0.2344	0.3438	0.1250	
C	0.1250	0.3438	0	0.1250	0.4531	
D	0.2344	0.2344	0.1250	0	0.1250	
E	0.2344	0.1250	0.1250	0.1250	0	

Selection of Cities for respective ant						
City	T	T ^a	Cost(n)	1/n	(1/n) ^b	T ^a (1/n) ^b
AB	0.1250	0.2333	3	0.3333	0.4635	0.1081
AC	0.1250	0.2333	6	0.1667	0.2853	0.0665
*AD	0.3438	0.4736	2	0.5000	0.6156	0.2915
AE	0.3438	0.4736	3	0.3333	0.4635	0.2195

Ant 1 Path						
Selection of Second City						
AB	0.1250	0.2333	3	0.3333	0.4635	0.1081
AC	0.1250	0.2333	6	0.1667	0.2853	0.0665
*AD	0.3438	0.4736	2	0.5000	0.6156	0.2915
AE	0.3438	0.4736	3	0.3333	0.4635	0.2195

Selection of third City						
Selection of fourth City						
*DB	0.3438	0.4736	2	0.5000	0.6156	0.2915
DC	0.1250	0.2333	6	0.1667	0.2853	0.0665
DE	0.1250	0.2333	6	0.1667	0.2853	0.0665

Selection of last City						
Path for ant 1: A D B C E A						
CE	0.4531	0.5746	4	0.2500	0.3789	0.2177
Distance	2	2	5	4	3	Total = 16

Ant 2 Path						
Selection of Second City						
BA	0.1250	0.2333	3	0.3333	0.4635	0.1081
BC	0.2344	0.3622	5	0.2000	0.3241	0.1174
*BD	0.3438	0.4736	2	0.5000	0.6156	0.2915
BE	0.1250	0.2333	3	0.3333	0.4635	0.1081

Selection of third City						
Selection of fourth City						
*DA	0.3438	0.4736	2	0.5000	0.6156	0.2915
DC	0.1250	0.2333	6	0.1667	0.2853	0.0665
DE	0.1250	0.2333	6	0.1667	0.2853	0.0665

Selection of last City						
Path for ant 2: B D A E C B						
EC	0.4531	0.5746	4	0.2500	0.3789	0.2177
Distance	2	2	3	4	5	Total = 16

Ant 3 Path						
Selection of Second City						
CA	0.1250	0.2333	6	0.1667	0.2853	0.0665
CB	0.3438	0.4736	5	0.2000	0.3241	0.1535
CD	0.1250	0.2333	6	0.1667	0.2853	0.0665
*CE	0.4531	0.5746	4	0.2500	0.3789	0.2177

Table 7: Cont..

City	T	T ^a	Cost(n)	1/n	(1/n) ^b	T ^a (1/n) ^b	$\sum T^a(1/n)^b$	Probability of next city
Selection of third City								
*EA	0.3438	0.4736	3	0.3333	0.4635	0.2195	0.3941	0.5569
EB	0.1250	0.2333	3	0.3333	0.4635	0.1081	0.3941	0.2743
ED	0.1250	0.2333	6	0.1667	0.2853	0.0665	0.3941	0.1689
Selection of fourth City								
AB	0.1250	0.2333	3	0.3333	0.4635	0.1081	0.3996	0.2705
*AD	0.3438	0.4736	2	0.5000	0.6156	0.2915	0.3996	0.7295
Selection of last City								
*DB	0.3438	0.4736	2	0.5000	0.6156	0.2915	0.2915	1.0000
Path for ant 3: C E A D B C								
Distance	4	3	2	2	5	Total = 16		
Ant 4 Path								
Selection of Second City								
*DA	0.2344	0.3622	2	0.5000	0.6156	0.2230	0.5790	0.3851
DB	0.2344	0.3622	2	0.5000	0.6156	0.2230	0.5790	0.3851
DC	0.1250	0.2333	6	0.1667	0.2853	0.0665	0.5790	0.1149
DE	0.1250	0.2333	6	0.1667	0.2853	0.0665	0.5790	0.1149
Selection of third City								
AB	0.1250	0.2333	3	0.3333	0.4635	0.1081	0.3425	0.3156
AC	0.1250	0.2333	6	0.1667	0.2853	0.0665	0.3425	0.1943
*AE	0.2344	0.3622	3	0.3333	0.4635	0.1679	0.3425	0.4901
Selection of fourth City								
EC	0.1250	0.2333	5	0.2000	0.3241	0.0756	0.1837	0.4115
*EB	0.1250	0.2333	3	0.3333	0.4635	0.1081	0.1837	0.5885
Selection of last City								
*BC	0.3438	0.4736	4	0.2500	0.3789	0.1794	0.1794	1.0000
Path for ant 4: D A E B C D								
Distance	2	3	3	5	6	Total = 19		
Ant 5 Path								
Selection of Second City								
*EA	0.2344	0.3622	3	0.3333	0.4635	0.1679	0.4309	0.3896
EB	0.1250	0.2333	3	0.3333	0.4635	0.1081	0.4309	0.2509
EC	0.1250	0.2333	4	0.2500	0.3789	0.0884	0.4309	0.2051
ED	0.1250	0.2333	6	0.1667	0.2853	0.0665	0.4309	0.1544
Selection of third City								
AB	0.1250	0.2333	3	0.3333	0.4635	0.1081	0.3976	0.2719
AC	0.1250	0.2333	6	0.1667	0.2853	0.0665	0.3976	0.1674
*AD	0.2344	0.3622	2	0.5000	0.6156	0.2230	0.3976	0.5608
Selection of fourth City								
*DB	0.2344	0.3622	2	0.5000	0.6156	0.2230	0.2895	0.7701
DC	0.1250	0.2333	6	0.1667	0.2853	0.0665	0.2895	0.2299
Selection of last City								
*BC	0.3438	0.4736	5	0.2000	0.3241	0.1535	0.1535	1.0000
Path for ant 5: E A D B C E								
Distance	3	2	2	5	4	Total = 16		
* Selected City								

Table 8:Iteration-5

Pheromone distribution						
	A	B	C	D	E	
A	0	0.0625	0.0625	0.3594	0.2969	
B	0.0625	0	0.2422	0.3594	0.0625	
C	0.0625	0.2969	0	0.0625	0.4141	
D	0.1797	0.1797	0.0625	0	0.0625	
E	0.2422	0.0625	0.125	0.0625	0	

Selection of Cities for respective ant						
City	T	T ^a	Cost(n)	1/n	(1/n) ^b	T ^a (1/n) ^b
AB	0.0625	0.1436	3	0.3333	0.4635	0.0665
AC	0.0625	0.1436	6	0.1667	0.2853	0.0410
*AD	0.3594	0.4885	2	0.5000	0.6156	0.3007
AE	0.2969	0.4274	3	0.3333	0.4635	0.1981

Ant 1 Path						
Selection of Second City						
AB	0.0625	0.1436	3	0.3333	0.4635	0.0665
AC	0.0625	0.1436	6	0.1667	0.2853	0.0410
*AD	0.3594	0.4885	2	0.5000	0.6156	0.3007
AE	0.2969	0.4274	3	0.3333	0.4635	0.1981

Selection of third City						
Path for ant 1: A D B C E A						
Distance	2	2	5	4	3	Total = 16

Ant 2 Path						
Selection of Second City						
BA	0.0625	0.1436	3	0.3333	0.4635	0.0665
BC	0.2422	0.3706	5	0.2000	0.3241	0.1173
*BD	0.3594	0.4885	2	0.5000	0.6156	0.3007
BE	0.0625	0.1436	3	0.3333	0.4635	0.0665

Selection of third City						
Path for ant 2: B D A E C B						
Distance	2	2	3	4	5	Total = 16

Ant 3 Path						
Selection of Second City						
CA	0.0625	0.1436	6	0.1667	0.2853	0.0410
CB	0.2969	0.4274	5	0.2000	0.3241	0.1385
CD	0.0625	0.1436	6	0.1667	0.2853	0.0410
*CE	0.4141	0.5394	4	0.2500	0.3789	0.2044

Table 8: Cont...

City	T	T ^a	Cost(n)	1/n	(1/n) ^b	T ^a (1/n) ^b	$\sum T^a(1/n)^b$	Probability of next city
Selection of third City								
*EA	0.2969	0.4274	3	0.3333	0.4635	0.1981	0.3056	0.6482
EB	0.0625	0.1436	3	0.3333	0.4635	0.0665	0.3056	0.2178
ED	0.0625	0.1436	6	0.1667	0.2853	0.0410	0.3056	0.1340
Selection of fourth City								
AB	0.0625	0.1436	3	0.3333	0.4635	0.0665	0.3673	0.1812
*AD	0.3594	0.4885	2	0.5000	0.6156	0.3007	0.3673	0.8187
Selection of last City								
*DB	0.3594	0.4885	2	0.5000	0.6156	0.3007	1.0000	
Path for ant 3: C E A D B C								
Distance	4	3	2	2	5	Total = 16		
Ant 4 Path								
Selection of Second City								
*DA	0.1797	0.3007	2	0.5000	0.6156	0.1851	0.4522	0.4094
DB	0.1797	0.3007	2	0.5000	0.6156	0.1851	0.4522	0.4094
DC	0.0625	0.1436	6	0.1667	0.2853	0.0410	0.4522	0.0906
DE	0.0625	0.1436	6	0.1667	0.2853	0.0410	0.4522	0.0906
Selection of third City								
AB	0.0625	0.1436	3	0.3333	0.4635	0.0665	0.2793	0.2383
AC	0.0625	0.1436	6	0.1667	0.2853	0.0410	0.2793	0.1467
*AE	0.2422	0.3706	3	0.3333	0.4635	0.1718	0.2793	0.6150
Selection of fourth City								
*EC	0.1250	0.2333	5	0.2000	0.3241	0.0756	0.1422	0.5319
EB	0.0625	0.1436	3	0.3333	0.4635	0.0665	0.1422	0.4680
Selection of last City								
*CB	0.2969	0.4274	4	0.2500	0.3789	0.1619	0.1619	1.0000
Path for ant 4: D A E C B D								
Distance	2	3	4	5	2	Total = 16		
Ant 5 Path								
Selection of Second City								
*EA	0.2422	0.3706	3	0.3333	0.4635	0.1718	0.3677	0.4672
EB	0.0625	0.1436	3	0.3333	0.4635	0.0665	0.3677	0.1810
EC	0.1250	0.2333	4	0.2500	0.3789	0.0884	0.3677	0.2404
ED	0.0625	0.1436	6	0.1667	0.2853	0.0410	0.3677	0.1114
Selection of third City								
AB	0.0625	0.1436	3	0.3333	0.4635	0.0665	0.2926	0.2274
AC	0.0625	0.1436	6	0.1667	0.2853	0.0410	0.2926	0.1400
*AD	0.1797	0.3007	2	0.5000	0.6156	0.1851	0.2261	0.8188
Selection of fourth City								
DB	0.1797	0.3007	2	0.5000	0.6156	0.1851	0.2261	0.1812
Selection of last City								
*BC	0.2969	0.4274	5	0.2000	0.3241	0.1385	0.1385	1.0000
Path for ant 5: E A D B C E								
Distance	3	2	2	5	4	Total = 16		
* Selected Edge								

References

- [1] C. M. Dorigo, V. Maniezzo, and A. Colorni, "The ant system: Optimization by a colony of cooperating agents," IEEE Transactions on System, Man, and Cybernetics, Part B, vol.26, pp. 29-41, 1996.
- [2] C. Blum, "Ant Colony Optimization: Introduction and recent trends," Science Direct, Physics of Life Reviews 2(2005)353-373.
- [3] Zar Chi Su Su Hlaing and May Aye Khine, Member, IACSIT, Solving Traveling Salesman Problem by Using Improved Ant Colony Optimization Algorithm, International Journal of Information and Education Technology, Vol. 1, No. 5, December 2011, pp404-409.
- [4] Utkarsh Jaiswal, Shweta Aggarwal, Ant Colony Optimization, International Journal of Scientific & Engineering Research Volume 2, Issue 7, July-2011, pp 1-7
- [5] Krishna H. Hingrajiya, Ravindra Kumar Gupta, Gajendra Singh Chandel, An Ant Colony Optimization Algorithm for Solving Travelling Salesman Problem, International Journal of Scientific and Research Publications, Volume 2, Issue 8, August 2012, pp 1-6,
- [6] M. Dorigo, L M Gambardella Ant colonies for the traveling salesman problem. Bio Systems, 1997
- [7] M. Dorigo, L M Gambardella Ant Colony system; A cooperative learning approach to the Travelling salesman problem. IEEE Transactions on Evolutionary Computation, Vol.1, No.1, 1997
- [8] Marco Dorigo and Thomas Stutzle, Ant Colony Optimization, MIT Press, 2004.
- [9] Singiresu S. Rao, Engineering Optimization, Theory and Practice, Fourth Edition, John Wiley & Sons, Inc.